













limestone fines to produce sustainable crushed sand concrete with a strength and durability (Figure 4 and Figure 5) similar to that of concrete made with natural sand (Kenai 1999, Menadi 2009, Menadi 2011). The results of this investigation as well as that of other researchers have made it possible to modify local standards, which now accept up to 15% fines in crushed sand for reinforced concrete. Currently, most construction sites in the north of Algeria and, in particular, ready-mixed concrete plants use crushed sand.

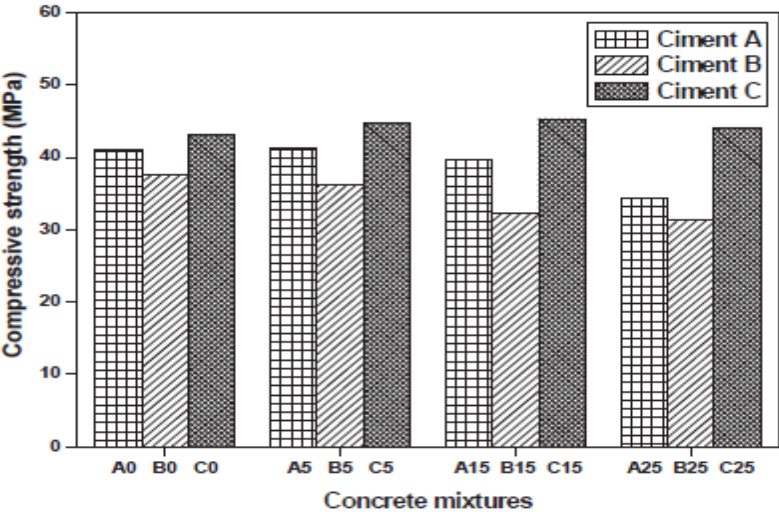


Fig.4 Compressive strength for concrete mixtures with different type of cement ( MENADI 2011)

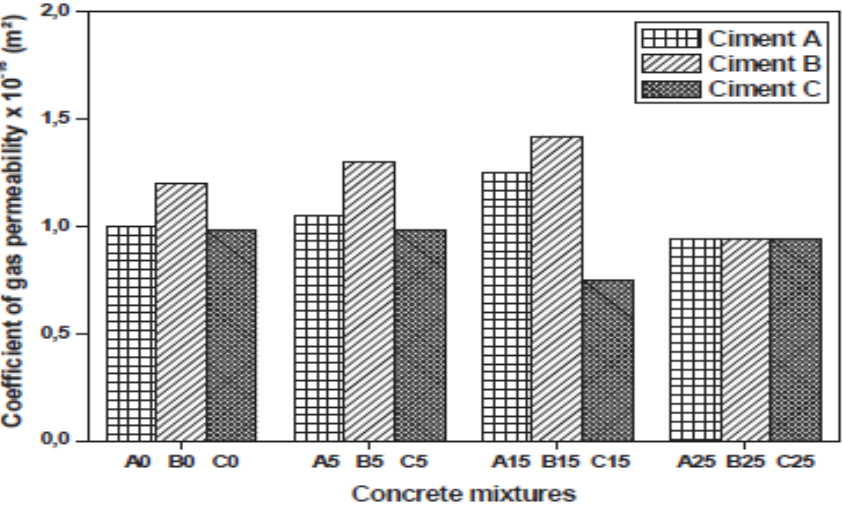


Fig.5 Gas permeability for concrete mixtures with different types of cements ( MENADI 2011)

#### 4.4 Strength and Durability of Self-Compacting Concrete

Self-compacting concrete (SCC) has been successfully used in many construction projects, mainly in structural members with complex forms and heavily congested reinforcement. It is a highly flowable concrete with minimal segregation that can flow into place under its own weight and compacted without any external vibration. This later could be obtained by the use of high amount of fine fillers (cement and mineral admixtures) in order to avoid aggregate settlement. The use of SCM is well accepted because of its improvement of concrete properties and also for environmental and economic reasons. The influence of Algerian slag on the properties of fresh and hardened SCC has been investigated (Boukendakdji 2009, Menadi 2012). The fresh properties of SCC were determined using slump flow, V-funnel flow time, J-ring, U-box filling height and geotechnical test method sieve stability tests. An optimum slag content of 15% seems to give a good SCC mixture with workability retention of about 60 minutes. A decrease in compressive strength was obtained with an increase of slag. Some applications of this by a local construction company are underway in slabs, bridges piers and foundations. Menadi (2013) examined the effect of using slag with different fineness to partially replace the cement in SCC and found that the strength and shrinkage of concrete are reduced with increasing amounts of slag whatever the fineness used (Figures 6 & 7).

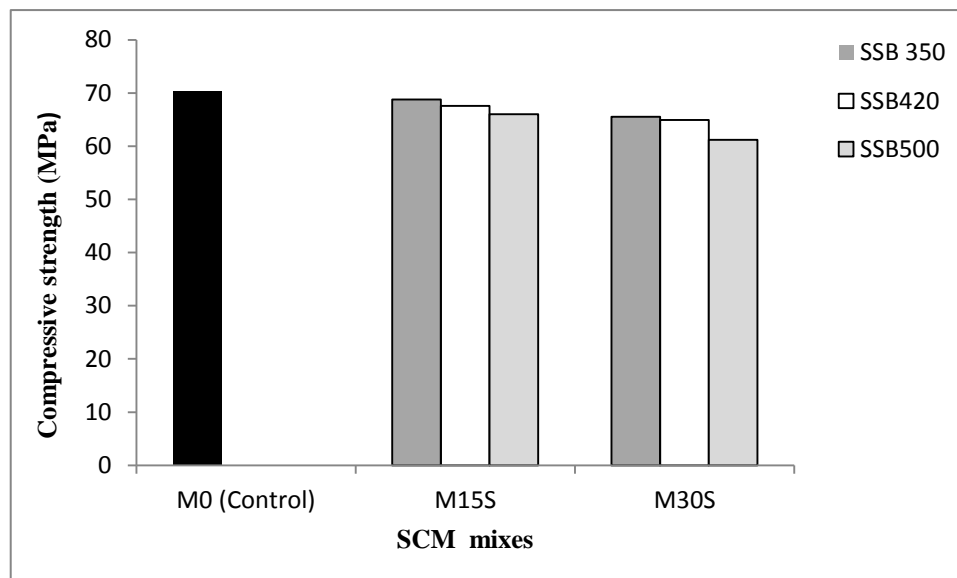


Fig. 6 Compressive strength of SCC containing slag with various finenesses (MENADI 2013)



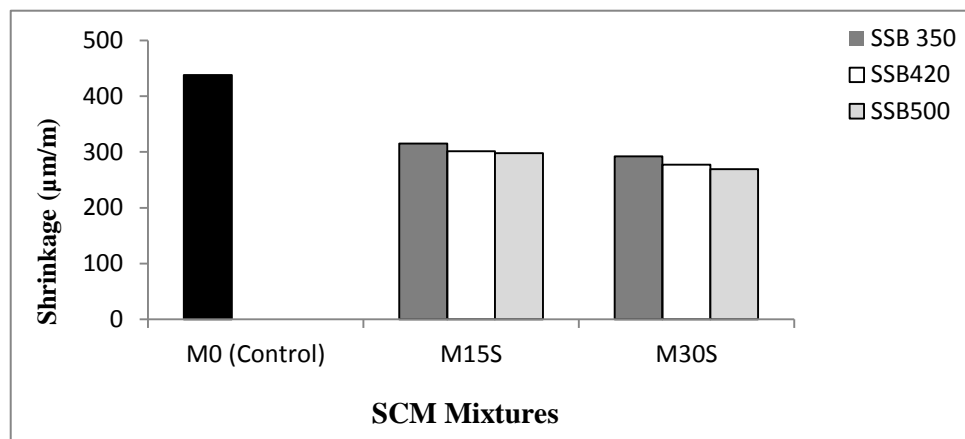


Fig.7 Shrinkage of self-compacting mortar mixes with slag (MENADI 2013).

#### 4.5 Use of Waste Cork for Insulation

The development of materials from waste wood is an interesting alternative to save energy and to preserve the environment. An experimental study was conducted to develop a cement composite insulating material from cork waste (Kenai 2007). The experimental study deals with expanded and raw cork mixed with cement in ratio Cement/Cork by volume (C/L) = 1/1, 1/2 and 1/3. Preliminary tests to optimize the mix were carried out. The physical, mechanical and thermo-physical characteristics of this composite material were then studied. The feasibility of the composite material was investigated by fabricating blocks to which cement rendering was applied and the bond between these blocks and the cement rendering measured. The use of waste cork as the only aggregate in concrete has given a composite material with bulk as low as 614 kg/m<sup>3</sup>. The results indicate a good compatibility between cork and cement. The compressive strength varies from 2 to 15 MPa and the flexural strength varies from 0.56 to 3.20 MPa. The coefficient of thermal conductivity was low and varied from 0.19 to 0.34 W/m<sup>2</sup>°K. The thermal conductivity obtained is lower than that of foam concrete, autoclave concrete and gypsum and is comparable to that of cellular concrete, expanded clay, fired bricks and clay foam. However, water absorption by capillary and by immersion was high. The composite with expanded cork has a better mechanical performance than that with raw cork. Nevertheless, the composite with raw cork has better insulating and acoustic performances. The possibility of using this composite material in roof insulation and as partition walls is proved.

#### 4.6 Cement Stabilized Soil

Earth construction is widespread in desert and rural areas because of its abundance and cheap labour and could be an alternative sustainable construction material for low cost housing in Algeria. An experimental study was conducted to optimize the compaction of the soil stabilized and improve physical and mechanical properties (Bahar 2004, Kenai 2006). The improvement of stability in water and the reduction of

the withdrawal by the strengthening of the earth by the straw have also been demonstrated (Bouhicha 2005).

## 5. CONCLUSIONS

The concrete industry is the largest consumer of energy and natural resources and hence contributes heavily to environmental degradation. In order to get a sustainable construction that is environment friendly, there is a need to use local materials and low-energy-based materials. The use of recycled aggregates and other recycled materials such as cork, limestone fines is an alternative solution and should be encouraged at the design stage of a project. The use of cement replacement materials such as slag and natural pozzolana in vibrated and self compacting concrete should be encouraged as they reduce carbon dioxide emission and give durable concrete.

## REFERENCES

- Bahar, R., Benazzoug, M. and Kenai, S. (2004), "Performance of compacted cement stabilized soil", *Cem. & conc. Comp.*, 26(7), 811-820.
- Belaidi, A.S.E., Azzouz, L., Kadri, E. and Kenai, S. (2012), "Effect of natural pozzolana and marble powder on the properties of self-compacting concrete", *Const. and Build. Mat.* 31, 251–257.
- Bouhicha, M.; Aouissi, F.; Kenai, S. (2005), "Performance of composite soil reinforced with barley straw", *Cem. & conc. Comp.*, 27(5), 617-621.
- Boukendakdji, O., Kenai, S. and Kadri, E.H. (2009), "Effect of slag on the rheology of self compacted concrete", *Const. and Build. Mat.*, 23, 2593-98.
- Brundtland G (ed.) (1987) Our Common Future. Report of the World commission on Environment and Development. Oxford University Press, Oxford, UK.
- Debieb, F. and Kenai, S. (2008), "The use of coarse and fine crushed brick aggregates in concrete", *Const. and Build. Mat.*, 22(5), 886-893.
- Ghrichi, M.; Kenai, S. and Mansour, S.M. (2007), " Mechanical properties and durability of mortar and concrete containing natural pozzolana", *Cem. & Conc. Comp.*, 29(7), 542-549.
- Ghrichi, M.; Kenai, S; Mansour, S.M.; Kadri, E. (2006), "Some engineering properties of concrete containing natural pozzolana and silica fume," *Journal of Asian Archit. & Build. Eng.*, 5 (2), 349-354.
- Hadjsadok, A., Kenai, S., Courard, L., Michel, F. and Khatib, J.M (2012) ," Durability of mortar and concretes containing slag with low hydraulic activity", *Cem. & Conc. Comp.* 34(5), 671–677.
- Kenai, S. and Merabeti, S. (2007), "Performance of a cement composite material using cork waste", *Proceedings of the international conference, Concrete Platform*, Belfast, Editor: Russell, M.I and Basheer, P.AM, pp.318-328.
- Kenai, S.; Bahar, R. and Benazzoug, M. ( 2006), "Effect of some compaction methods on the mechanical properties and durability of stabilized soil", *J. of Mat. Sci.*, 41(21), 6956-64.

- Kenai, S.; Ghrici, M. and Meziane, E.H. (2006), "Mechanical and durability properties of cement mortar with Algerian natural pozzolana", *J. of Mat. Sci.*, 41(21), 6965-72.
- Kenai, S.; Soboyejo, W. and Soboyejo, A. (2004), "Some engineering properties of limestone cement mortar and concrete", *Mat. & Manuf. Proc.*, 19(5), 949-961.
- Kenai, S.; Benna, Y. and Menadi, B. (1999), "The effect of fines in crushed calcareous sand on properties of mortar and concrete, " *International conference on infrastructure regeneration and rehabilitation, a vision for the next millennium*, Sheffield, England, pp.253-261, Editor: Swamy, R.N.
- Kenai, S., Attar, A., and Menadi, B., (2008), "Cement Industry and Concrete Technology in Algeria: Current Practices and Future Challenges", *11DBMC International Conference on Durability of Building Materials and components* ISTANBUL– TURKEY, May 11-14th, T11, P.8, Publication code:978-975-591-325-3.
- Khatib, JM, Menadi, B. and Kenai, S. (2009), "Effect of cement type on strength development of mortars containing limestone fines", *Excellence in Concrete Construction through Innovation – Limbachiya & Kew (eds), Proceedings of the conference held at the Kingston University, United Kingdom, 9 - 10 September 2008*, Edited by Hsein Y . Kew and Mukesh C . Limbachiya, Taylor & Francis
- Lemay, L. and Ashley, E. (2011), "The Sustainability of Concrete Pavements. Report CSR03, National Ready Mixed Concrete Association, Silver Spring, MD, USA.
- Malhotra, V.M. (2004), "Role of supplementary cementing materials and superplasticizers in reducing greenhouse gas emissions", *In Fiber composites, high-performance concrete, and smart materials; Proc. ICFRC intern. conf.*, Chennai, India, pp. 489 - 99.
- Menadi, B., Kenai, S.; Khatib, J.M and Ait mokhtar, K. (2009), "Strength and durability of concrete incorporating crushed limestone sand", *Const. & Build. Mat.*, 23, 625–633.
- Menadi, B., Kenai, S. and Kouider Djelloul, O. (2012), "Properties of Fresh Self-Compacting Concrete Containing Slag", *10<sup>th</sup> International Congress on Advances in Civil Engineering, Middle East Technical University, Ankara, Turkey, 17-19 October 2012*, pp.8
- Menadi, B., Kenai, S., Hammat, S. and Khatib, J.M. (2013) "The Influence of the Fineness of Mineral Additions on Strength and Drying Shrinkage of Self-Compacting Mortars, 14<sup>th</sup> Int. Conf. on Non Conventional Construction Materials and Technologies "Construction Materials & Technologies for Sustainability", Joao Pessoa, Paraiba, Brasil, March 24<sup>th</sup>-27<sup>th</sup> 2013.
- Menadi, B. and Kenai, S. (2011), "Effect of cement type on the transport properties of crushed sand concrete", *The 2<sup>nd</sup> international conference ICMT*, July 26-28, 2011 in Hangzhou, China, pp.6318-6321.
- National Ready Mixed Concrete Association (NRMCA) (2008), "Concrete CO<sub>2</sub> Fact sheet", *Publication N° 2PCO2*.
- World Commission on Environment and Development (WCED) (1987), "Our common future", *The Brundtland report*. Oxford: Oxford University Press.
- Zhang, J. and Khatib, J.M (2008), "Using wheat husk ash in the production of a sustainable construction material", *Real Estate and Development Economics Research Journal* 1(1): 18–29.