

deformation gives an indication of the boundary to move from the stationary pressure to the main working pressure. As a result, it exhibits an S shape, which is somewhat lower than the main working pressure under one point. The reason for this is that the upper sand is constrained in the lateral direction, so that a large wall frictional force is generated upward and the silo or arch action resists the vertical soil pressure. Thus, instead of increasing the earth pressure at the upper part of the wall, it decreases at the lower part and does not change greatly. The lateral earth pressure distribution profile for other representative deformation modes are shown in Figs. 1(b), 1(c), and 1(d). Note that when the wall moves at the bottom end, the shear force from the ground also works at the bottom end, and tends to decrease below the main working pressure. The amount of displacement at the lower ends are the same in Figs. 1c and 1d. The soil pressure in Fig. 1(d) tends to be smaller than in Fig. 1(c) due to the presence of the arching effect.

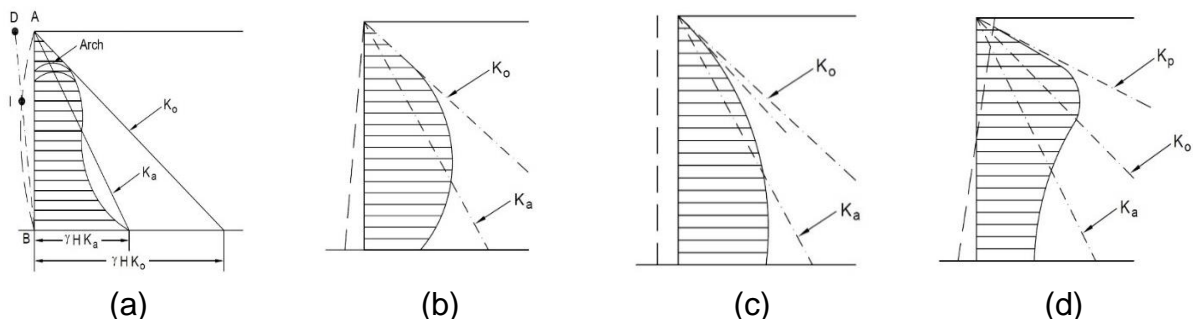


Fig. 1 Displacement and lateral earth pressure distribution: (a) Rigid and flexible wall, (b) Restrained top, (c) Unrestrained, and (d) Arching effect

3. HALF CROSS-SECTION TEST SETUP

The dredged fill material was obtained from a local dredging site in the Saemangeum river estuary near Gunsan City. The physical properties of the dredged fill are shown in Table 1. The geotextile fabric used in the test was polyethylene (PET). The experimental setup is shown in Fig. 2. The dimensions of the observation tank, as shown in Fig. 2(a) are 1.5 m (L) x 1.0 m (W) x 1.5 m (H). The tank, which was supported by steel bar framing, consist of transparent glasses for easy viewing of the test specimen. Pressure gauges were placed in the manner as shown in Fig. 2(b) to monitor the development of horizontal and vertical soil pressures. SP-1 and SP-2 measure the horizontal soil pressures, while SP-3 and SP-4 measure the vertical soil pressures. Subsequently, the half-cross section tube was installed and supported by two load cells at the top and bottom to monitor the tensile and compressive forces developing in the tube. The pressure gauges and load cells were connected to a data logger which transmits the data readings into a desktop PC. The tube was filled in 11 stages to a height of 60% the theoretical diameter via the inlet. The filling procedure was done by initially filling the tube with dry soil. Thereafter, water was added to evenly distribute the soil in the tube and to simulate the tube in submerged conditions. The process was continuously repeated until the desired tube height was achieved.

Table 1. Dredged Fill Properties

Item	Unit	Quantity
Specific gravity of soil solids, G_s	N/A	2.705
Percent passing #200 sieve	%	26.2
D_{10}	N/A	0.028
D_{30}	N/A	0.081
D_{60}	N/A	0.750
C_U	N/A	6.25
C_C	N/A	1.34
Soil classification (USCS)	N/A	SM (Silty-Sand)

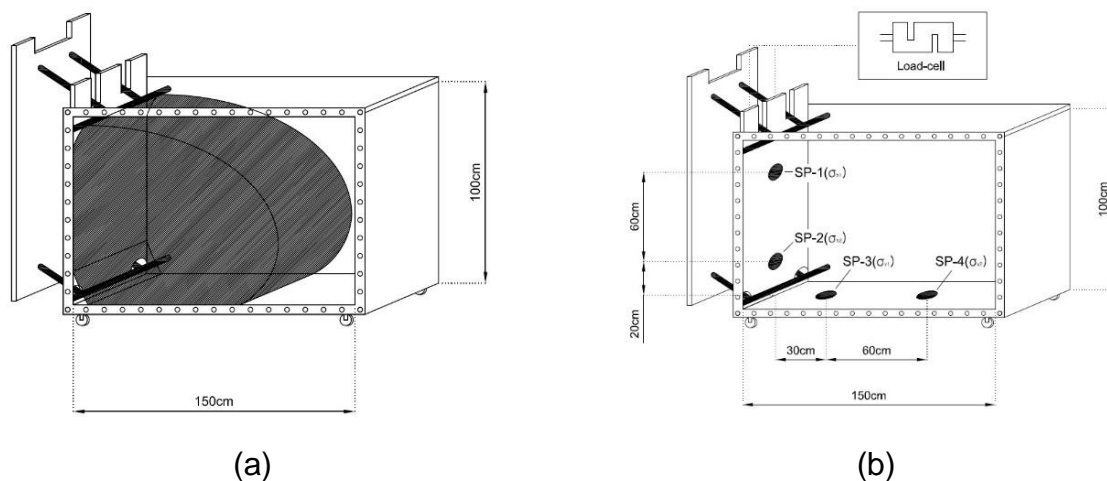


Fig. 2 Experimental setup: (a) Model test apparatus and (b) Gauge placement

4. RESULTS AND DISCUSSION

In this study, 4 different stages or conditions were experienced by the tube. In sequential order, the stages experienced were the filling stage, submerged stage, dewatering stage, and dry stage. The filling stage and submerged stage transpired for 85 mins and 45 mins respectively. After the submerged stage, the observation tank was allowed to dewater for 2 days until the dry stage was achieved. The results of the scale model test are shown in Figs. 3-6. During filling, the tube is exposed to high tensile stress resulting in elongation (Moo-Young et al., 2002). It was found that tension occurs at the top of the tube while compression occurs at the bottom due to the confining effect of the geotextile. Also, the maximum tensile and compressive forces at the center of the tube (rigid wall) are experienced during the filling stage.

Fig. 4 shows the developing soil pressures with respect to time and Fig. 5 shows the vertical soil pressure with respect to depth at different conditions. Arrows indicate the development of the soil pressure. At the filling stage, the soil pressures continuously increased as the tube height increased. In the submerged stage, the vertical soil pressure decreased as the density of the soil decreased. Also, the horizontal soil pressure decreased due to lateral spreading, as the tube started to stabilize in the submerged condition. Due to dewatering, the vertical soil pressure near

the center of the tube rapidly increased as the density increased and was constant thereafter. As the tube height decreased due to spreading, the vertical soil pressure outside the central region of the tube decreased at the start of the dewatering stage and was constant thereafter. In the dewatering stage, the increase in horizontal pressure at the top portion of the tube while the bottom horizontal pressure decreases, shows the effect of arching. The arching effect at the upper portion and the stress drop at the bottom portion increases, as the density of the soil increases (Fang and Ishibashi, 1986).

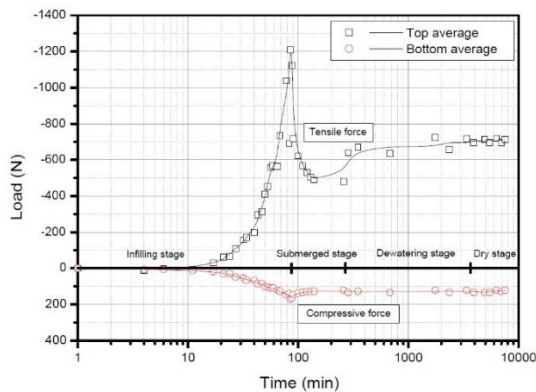


Fig. 3 Tensile and compressive forces developing in the tube

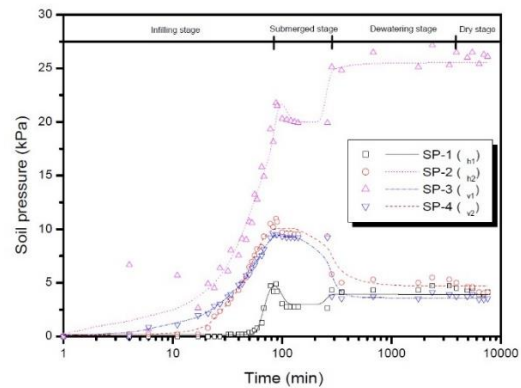


Fig. 4 Soil pressures developing in the tube

Fig. 6 shows the coefficient of earth pressure with respect to time. Results show that the coefficient of earth pressure increases during the filling stage. This is because of high filling pressures and due to increasing tube height. After the removal of the filling pressure, the coefficient of earth pressure decreased until the tube was stable or at rest during the submerged stage. However, as the observation tank was dewatered or as the density increased, the coefficient of earth pressure at SP-1/SP-3 (depth of 5cm) increased while the coefficient of earth pressure at SP-2/SP-3 (depth of 65 cm) decreased due to the arching effect. The coefficient of earth pressure at SP-2/SP-4 (depth of 65 cm) increased as the tube height decreased due to spreading.

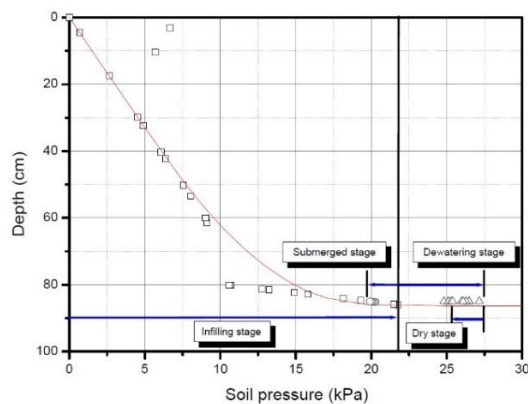


Fig. 5 Soil pressure with respect to depth

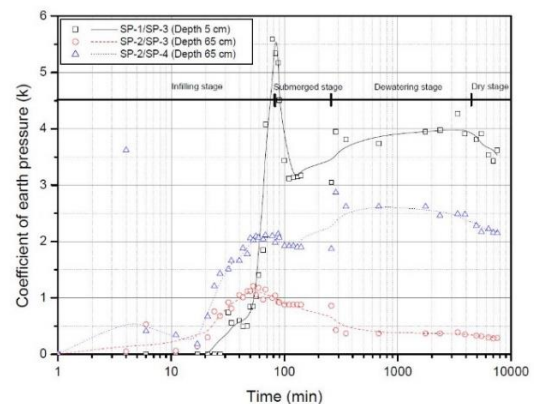


Fig. 6 Coefficient of earth pressure (K) with respect to time

During the 4 stages experienced by the tube, the K at the top portion of the central region ranges between 3.00~5.60 while the bottom portion ranges between 0.29~1.15. Farther from the central region, the K at the bottom portion ranges from 1.98~2.50.

5. CONCLUSION

A half cross-section model test was carried out to quantitatively evaluate the tensile strength, and earth pressure (vertical and horizontal) of a geotextile tube filled with dredged soil and water. Based on the laboratory test conducted, the following conclusions are drawn:

- It was found that tension occurs at the top of tube while compression occurs at the bottom due to the confining effect of the geotextile.
- In the dewatering stage, the increase in horizontal pressure at the top portion and the decrease in horizontal pressure at the bottom, shows the effect of arching. The arching effect at the upper portion and the stress drop at the bottom portion increases, as the density of the soil increases.
- The coefficient of earth pressure increases during the filling stage due to high filling pressures and due to increasing tube height.
- The coefficient of earth pressure is extremely high at the top portions of the tube. Conversely, the coefficient of earth pressure is low at bottom portions of the tube. It can also be concluded that the coefficient of earth pressure is higher at distances farther away from the center of the tube.

ACKNOWLEDGEMENT

This research was supported by Basic Science Research Program through the National Research Foundation of Korea(NRF) funded by the Ministry of Education (NRF-2017R1D1A3B03034189) & Brain Korea 21 Plus.

REFERENCES

- Fang, Y. & Ishibashi, I. (1986). Static earth pressures with various wall movements. *J. Geotech. Engng, ASCE*, Vol. **112**(3), 317– 333.
- Jaky, J. (1944). "The coefficient of earth pressure at rest." *J. for Soc. of Hungarian Arch. and Engrs.*, Budapest, Hungary, (Oct.), 355-358.
- Kim, H.J., Won, M.S., Lee, J.B., Joo, J.H. & Jamin, J.C. (2015), "Comparative study on the behavior of soil fills on rigid acrylic and flexible geotextile containers." *Geomechanics and Engineering*, Vol. **9**(2), 243-259
- Moo-Young, H.K., Douglas, A.G., Xinghua, Mo. (2002). Testing procedures to assess the viability of dewatering with geotextile tubes. *Geotextiles and Geomembranes*, Vol. **20** (5), 289–303.