

A robust sequence image matching algorithm for aircraft position and heading

* Xuefei Leng¹⁾, Jiangtao Ru²⁾ and Zhe Gong³⁾

^{1), 2), 3)} *College of Astronautics, Nanjing University of Aeronautics
And Astronautics, Nanjing (China) 210016*

¹⁾ lengxuefei@nuaa.edu.cn

ABSTRACT

As for the translation and rotation existing between sequence images in the image matching navigation system, it is necessary to calculate the position and heading parameters simultaneously. Therefore, an algorithm for sequence image matching based on Harris corner and Mean Hausdorff Distance (MHD) was proposed. In this method, the corners are described in both polar coordinates and Cartesian coordinates. Considering the rotational invariance of radius set in polar coordinates, MHD is used to match radius sets between sequence images. Then, the rotation angle and the translation distance can be calculated. Experimental analysis has been carried out for the influence of different Gauss noise and the number of Harris corner. Results show that images can still be matched successfully with rotation angle of 0, 60 and 90 degrees under Gauss white noise with 0.01 variance, while the position error is less than one pixel, heading angle error is less than 5 degrees, and matching time is about 4 seconds. So, this algorithm can meet the requirements of real-time, robustness and accuracy of sequence image matching for navigation system.

1. INTRODUCTION

Image matching technology is an important technology in aircraft navigation system. The traditional task of image matching navigation is to find the location of real-time image taken by sensor in the reference image which is stored in database. In this way, the position information of the aircraft is obtained, which can be used to correct the accumulative error of Inertial Navigation System (INS) in long term work (Wu(2013)). There are two types in image matching methods: one is based on feature matching, which extracts points, lines, and other obvious features from the images, then match

¹⁾ Associate Professor

²⁾ Graduate Student

³⁾ Graduate Student

This work was supported by the National Natural Science Foundation of China Youth Science Fund Project (No. 51205193) and the Research Fund for Doctoral Program of the Ministry of Education (No.20123218120037).

with the feature description sets of images, some feature extraction algorithms can be found in Trzcinski(2015), Shrivakshan(2012); Another is based on the gray-value-based matching, which mainly makes use of correlation by searching the template image in the reference image. However, because of the different sampling time, height, shooting angle and weather condition, there are big gray-scale variation, geometric distortion, and different noise distribution, which lead to the gray difference, and the low matching (Masatoshi(2015)). Meanwhile, the bigger size of the reference image will lead to longer search time. So, how to improve the success rate and real-time of image matching is the key to improve the performance of image matching aided navigation system (Chen(2012)).

Much work has been carried out on the image matching navigation. By calculating the correlation between real-time sequence images, YaoJun(2010) proposed the "relative" image matching between the current frame and the dynamic key frame. Because of the small difference in image-forming condition between the sequence images and the similar noise distribution, the image matching success rate is improved. However, there is not only translation but also rotation between sequence images, so how to effectively match the images having both translation and rotation is the key of sequence image matching.

Image matching based on Hausdorff distance has been widely used because of its fast calculation speed and good robustness to noise. The classical Hausdorff distance (Huttenlocher(1993)) is easily influenced by noise and occlusion. It has been improved by many scholars, such as Part Hausdorff Distance(PHD), Mean Hausdorff Distance(MHD), but they are sensitive to the rotation of the images. Leng(2006) et al. proposed Weighted Hausdorff Distance matching by making use of edge points and stable branch points (EDGE-WHD), which achieved a good performance in condition of small rotation angle. However, it is not suitable for image matching with large rotation angle, and cannot obtain the rotation the angle.

To solve these problems, we propose an algorithm based on Harris corner and MHD, which achieved a good performance with any rotation angle by using the rotation invariance of radius sets in polar coordinates. Besides, MHD between point sets of circular templates is used to calculate the rotation angle. Experimental results show that the algorithm has robustness and can meet the requirements of real-time and accuracy of sequence image matching.

2. PRINCIPLE OF SEQUENCE IMAGE MATCHING NAVIGATION

Fig. 1 shows that camera planted on the aircraft along the axis of body axes coordinate system takes sequence images at fixed interval Δt . If the plane is flying smoothly along a straight line, O_2 is the center point of the current down looking image. Search for the homonymy point in the previous image, and calculate the distance between the homonymy point and center point O_1 in previous image. Flight distance ΔL can be calculated in a fixed interval ΔL with the knowledge of flight altitude and camera parameters. During the flight, if the camera is not vertically downward, Yu(2009) have proposed a modified model.

In the condition of unstable flight, there both translation and rotation change between sequence images. In this case, the rotation angle of the images can be calculated, and we can get the change of heading angle.

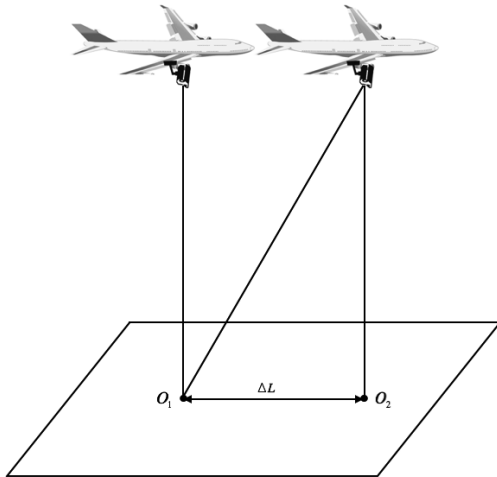


Fig. 1 Relationship between the center points of sequence images

3. ALGORITHM OF SEQUENCE IMAGE MATCHING

3.1 Feature points extraction

Sequence images include a lot of features, which are effected specifically by the translation and rotation of the images. It is common to use the corresponding relation of the sets of feature points in two frames to infer the relationship between images in image matching algorithm. In this paper the Harris corner is chosen as point feature, because of its rotation invariance and stable performance.

Harris corner detection is the feature extraction operator proposed by Harris and Stephens, specific steps can be found in Biswas(2015). Harris corner detection uses a size-fixed window moving in the image and observes the change of gray at the same time. If the window is in the flat area, the gray-scale change is very small in any direction; if in the area of edge, the gray-scale change is small in the direction of edge while the change is large in the direction perpendicular to the edge; if in the area of corner, and the gray-scale change is large in any direction. Gauss filter is used in order to improve the anti-noise ability. Gauss function is defined as:

$$\omega(x, y) = \frac{1}{2\pi\sigma^2} e^{-(x^2+y^2)/2\sigma^2} \quad (1)$$

x , y are the coordinates of the current point relative to the center point. This

function ensures that the high weight is assigned to the pixels near the center point. It will reduce the effect of noise.

The gray-scale change is defined as:

$$E(x, y) \cong [x, y] M \begin{bmatrix} x \\ y \end{bmatrix} \quad (2)$$

The matrix M is:

$$M = \omega(x, y) \otimes \begin{bmatrix} I_x^2 & I_x I_y \\ I_x I_y & I_y^2 \end{bmatrix} \quad (3)$$

I_x, I_y is gradient in the direction of x and y respectively. \otimes Indicates convolution. λ_1, λ_2 are eigenvalues of the matrix M , their relationship is described as follows:

- 1) λ_1, λ_2 are both large, the pixel is a corner point.
- 2) One of λ_1, λ_2 is large, and the other one is small, the pixel is an edge point.
- 3) λ_1, λ_2 are both small, the pixel is in the flat area.

Response function is defined as:

$$R = \det M - k(\text{trace}M)^2 \quad (4)$$

$\det M, \text{trace}M$ is the determinant and trace of the matrix M , k usually takes 0.04. If R is greater than the threshold, the point will be judged as a corner point.

3.2 Description of feature points set

Since there is a translation and rotation between sequence images, the overlapping part of two images should be selected to match the images. As shown in Fig. 2, only the circular part of the image will be considered.

Considering the distance between feature points and the center is invariant after the rotation, polar coordinates of corner points $P(x_i, y_i)$ in the circular region is adopted, where the radius of the circular region is R , the center is (x_0, y_0) , Polar coordinates transformation formula is shown as follows:

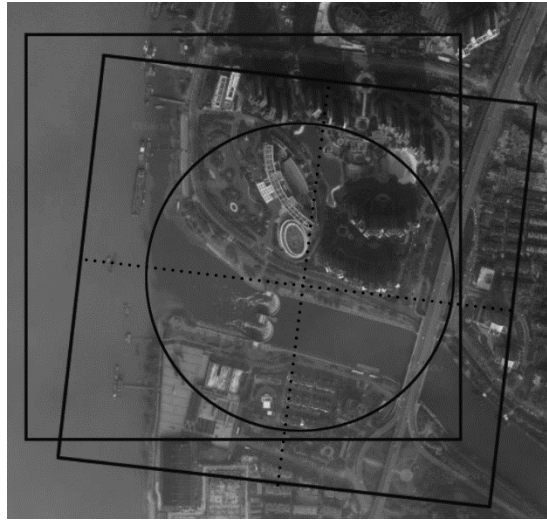


Fig. 2 Relationship between adjacent sequence images

$$\begin{cases} \rho_i = \sqrt{(x_i - x_0)^2 + (y_i - y_0)^2} \\ \tan \theta_i = \frac{y_i - y_0}{x_i - x_0} \end{cases} \quad (5)$$

$$0 \leq \rho_i \leq R, 0 \leq \theta_i \leq 2\pi$$

Where ρ_i is the polar radius of point $P(x_i, y_i)$, θ_i is the polar angle of point $P(x_i, y_i)$. Then feature points set of the image is described by the set (ρ_i, θ_i) .

3.3 Translation distance between sequence images based on MHD

The Harris corner extraction is needed for two adjacent frames for matching them. The problem of image matching is transformed into the matching between two point sets.

Setting that I_1 is the previous image and I_2 is the second. Circular template is the circular region of image I_2 , centered at point (x_0, y_0) , then polar coordinates of corner points in the circular template can be transformed into feature points set $\{(\rho_1, \theta_1), (\rho_2, \theta_2), \dots, (\rho_p, \theta_p)\}$. Search the circular template on the image I_1 to get feature points set covered by circular template, then we can obtain the polar coordinates set $\{(\xi_1, \varphi_1), (\xi_2, \varphi_2), \dots, (\xi_q, \varphi_q)\}$ centered at point (x_0, y_0) .

Because of the rotation invariance of the polar sets $\{\rho_1, \rho_2, \dots, \rho_q\}$, $\{\xi_1, \xi_2, \dots, \xi_q\}$ as shown in figure 3. MHD matching algorithm can be used.

MHD is a method to measure the degree of non-similarity between two sets. For the set $A = \{a_1, a_2, \dots, a_n\}$, $B = \{b_1, b_2, \dots, b_m\}$ MHD is defined as:

The distance $\|\bullet\|$ in MHD is redefined as Euclidean distance from point $(a_{\Delta\theta i}, b_{\Delta\theta i})$ to point (c_j, d_j) :

$$l_{ij} = \|(a_{\Delta\theta i}, b_{\Delta\theta i}) - (c_j, d_j)\| = \sqrt{(a_{\Delta\theta i} - c_j)^2 + (b_{\Delta\theta i} - d_j)^2}.$$

Now, the MHD is expressed as:

$$\begin{aligned} H_{PM}(\Delta\theta i) &= \\ &= \max(h_{PM}(\{(a_{\Delta\theta i}, b_{\Delta\theta i})\}, \{(c_j, d_j)\}), h_{PM}(\{(c_j, d_j)\}, \{(a_{\Delta\theta i}, b_{\Delta\theta i})\})) \end{aligned} \quad (8)$$

Where

$$\begin{cases} h_{PM}(\{(a_{\Delta\theta i}, b_{\Delta\theta i})\}, \{(c_j, d_j)\}) = \frac{1}{p} \sum_{i=1}^p \min_{(c_j, d_j) \in \{(c_j, d_j)\}} \sqrt{(a_{\Delta\theta i} - c_j)^2 + (b_{\Delta\theta i} - d_j)^2} \\ h_{PM}(\{(c_j, d_j)\}, \{(a_{\Delta\theta i}, b_{\Delta\theta i})\}) = \frac{1}{q} \sum_{j=1}^q \min_{(a_{\Delta\theta i}, b_{\Delta\theta i}) \in \{(a_{\Delta\theta i}, b_{\Delta\theta i})\}} \sqrt{(c_j - a_{\Delta\theta i})^2 + (d_j - b_{\Delta\theta i})^2} \end{cases}$$

The MHD set can be achieved by adjusting the value of $\Delta\theta \in [0, 2\pi)$:

$$\{H_{PM1}(\Delta\theta 1), H_{PM2}(\Delta\theta 2), \dots, H_{PMr}(\Delta\theta r)\}$$

The matched rotation angle corresponds to the minimum of the MHD, which means the rotation angle is obtained by $\Delta\theta_{\min}$, when the MHD is taken to a minimum $H_{PM \min}(\Delta\theta_{\min})$.

4. ANALYSIS OF EXPERIMENTAL RESULTS

In order to verify the algorithm, experiments are tested on the PC with CPU i5-4260U, frequency 1.4GHZ and 4G memory, combining with the opencv2.4.10 open source computer vision library.

Experiments are divided into two parts, carried out mainly from two aspects: robustness and real-time. In the first part of the experiment, the relationship between two sequence images are rotation and translation, and the robustness of the algorithm is verified by adding noise. In the second part of the experiment, different numbers of corner points are obtained by adjusting the threshold to compare the influence of the corner points number on the real-time performance.

4.1 Feasibility and robustness of the algorithm

In the first part of the experiment, the size of the sequence images are $255 * 255$. There are different translation and degrees of rotation between images (as shown in Fig. a, Fig. b), and Gauss noise with different variance is also added. The algorithm extracts the Harris corner of two images, and the circular template of image 2 (Fig. c). Matching area in image 1 is demonstrated in Figure d. Specific experimental results are shown in Tab.1. The unit of distance error is pixel, angle unit is degree.

As illustrated in Tab.1, the proposed algorithm can realize the matching of sequence images with different rotation angles and Gauss white noise added. The algorithm of this paper can guarantee the real-time performance without noise, when the accuracy of the rotation angle is 0.1 degree. Images can still be matched with rotation angle of 0, 60, and 90 degrees while Gauss white noise with different variance added. However, the distance error (The distance error is the Euclidean distance between the calculated distance and the real distance) is easy to get 1 pixel, because the algorithm is calculated based on the pixel.

For the real-time performance of the experiment, it is mainly affected by the number of Harris corners, the size of images, and the size of the circular template. In reality, the size of images and the circular templates is generally unchanged, which means running time is mainly affected by the number of Harris corner points. As shown in Tab.1, the number of Harris corner points is relatively stable without noise, which makes running time is keeping around 4s. With the noise interference, running time fluctuates because the number of Harris corner points is affected by noise.



Fig. a Corner distribution of image 1

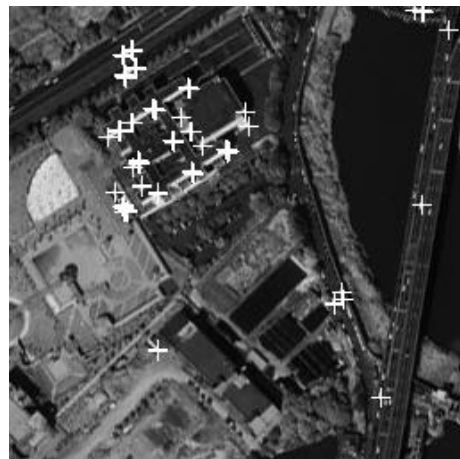


Fig. b Corner distribution of image 2

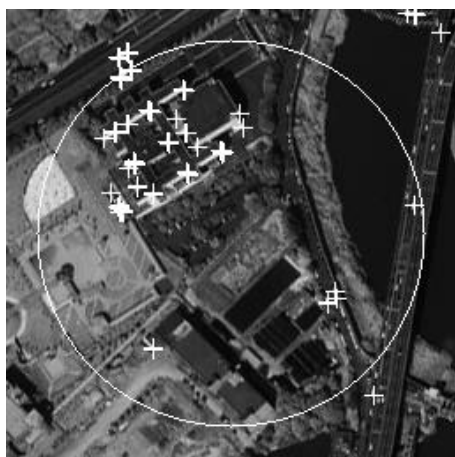


Fig. c Circular region of image 2

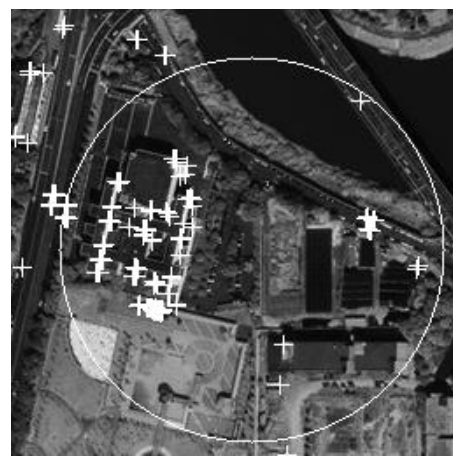


Fig. d Matching area in image 1

Fig. 3 Result of image matching

